


# Toyota Parking Aid 400

## TPA 400

Troubleshooting Manual - Typical performance graphs

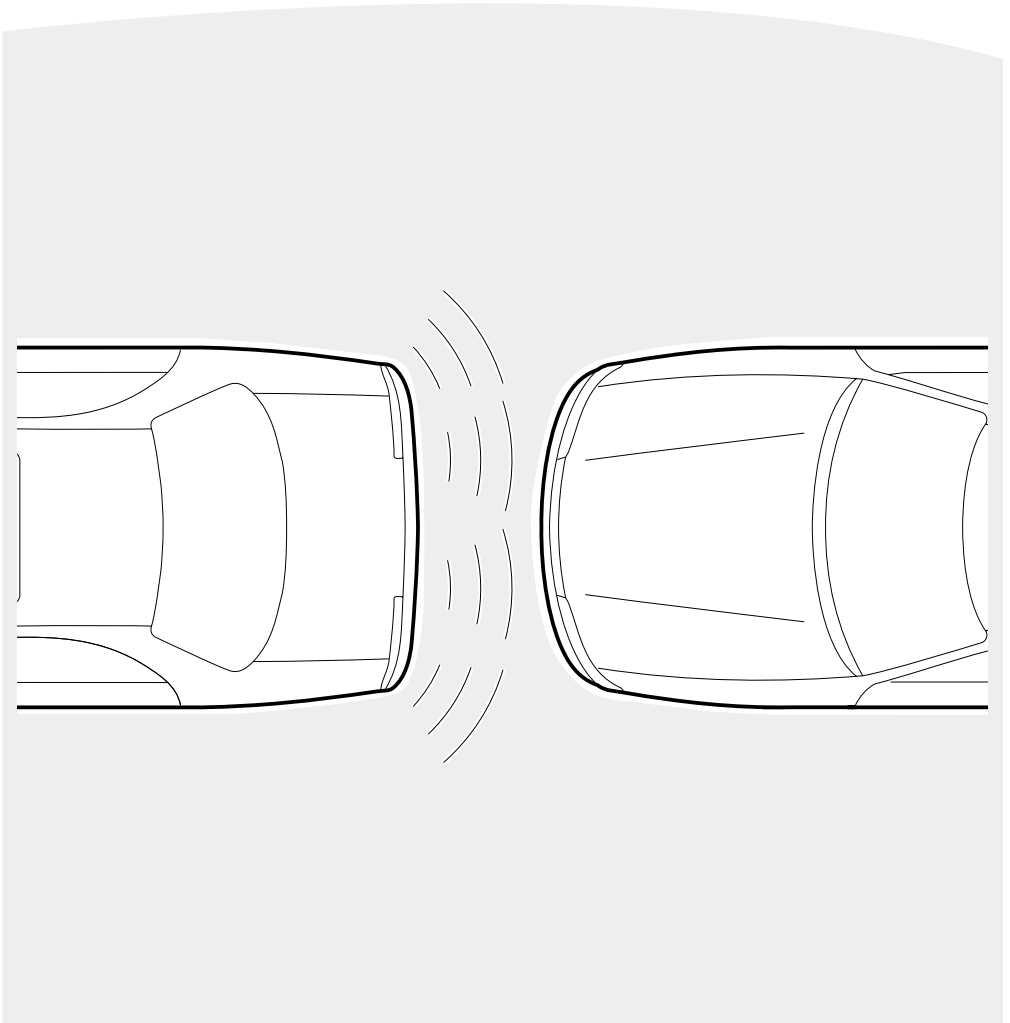


**NOTE:**

These graphs are given as typical example only, for a basic system troubleshooting.  
These graphs are therefore not intended and cannot be used as reference for warranty claims.

The final performance of the TPA 400 system is depending on vehicle conditions  
(height from ground , load status),

ambient conditions (kind of ground surface and walls around,  
clean sensors external surface, ultrasonic sources, ambient temperature)  
and installation tolerances, especially for the dynamic covering zone.

The performance of the system must be checked according to  
ISO standard 17386 ( MALSO) - Aug 07, 2002 .

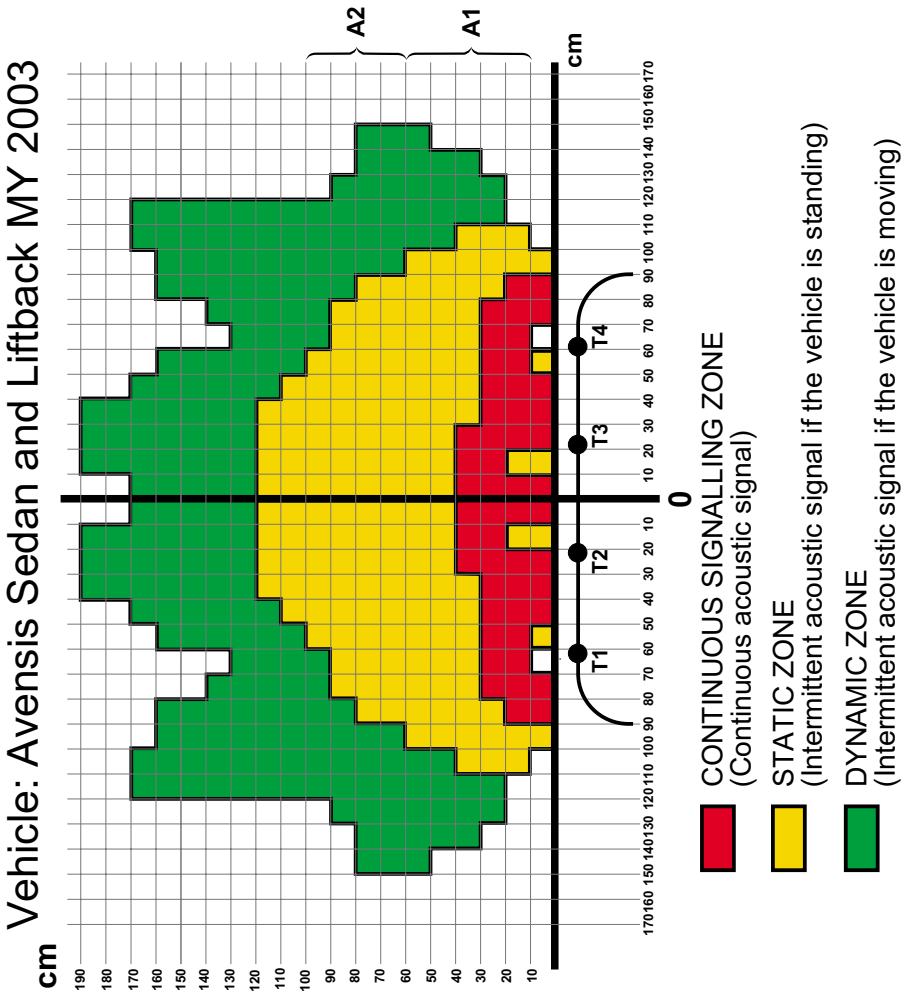


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

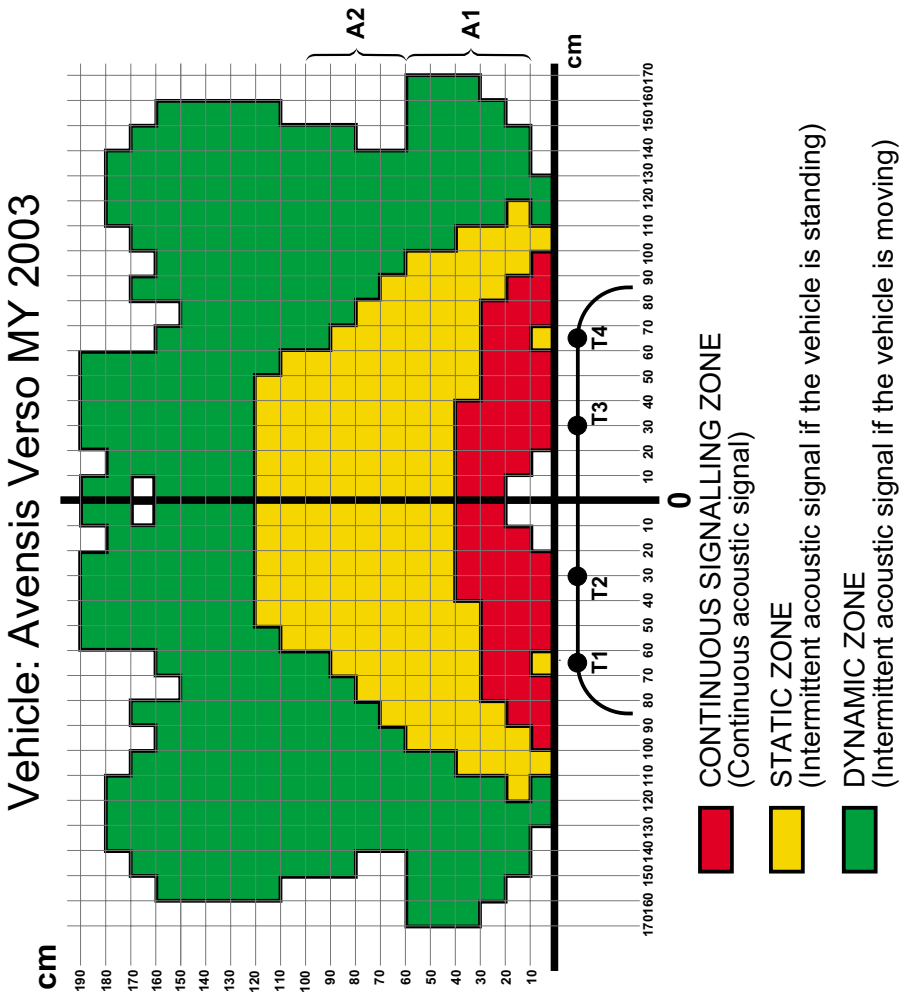


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

# Vehicle: Avensis Wagon MY 2003

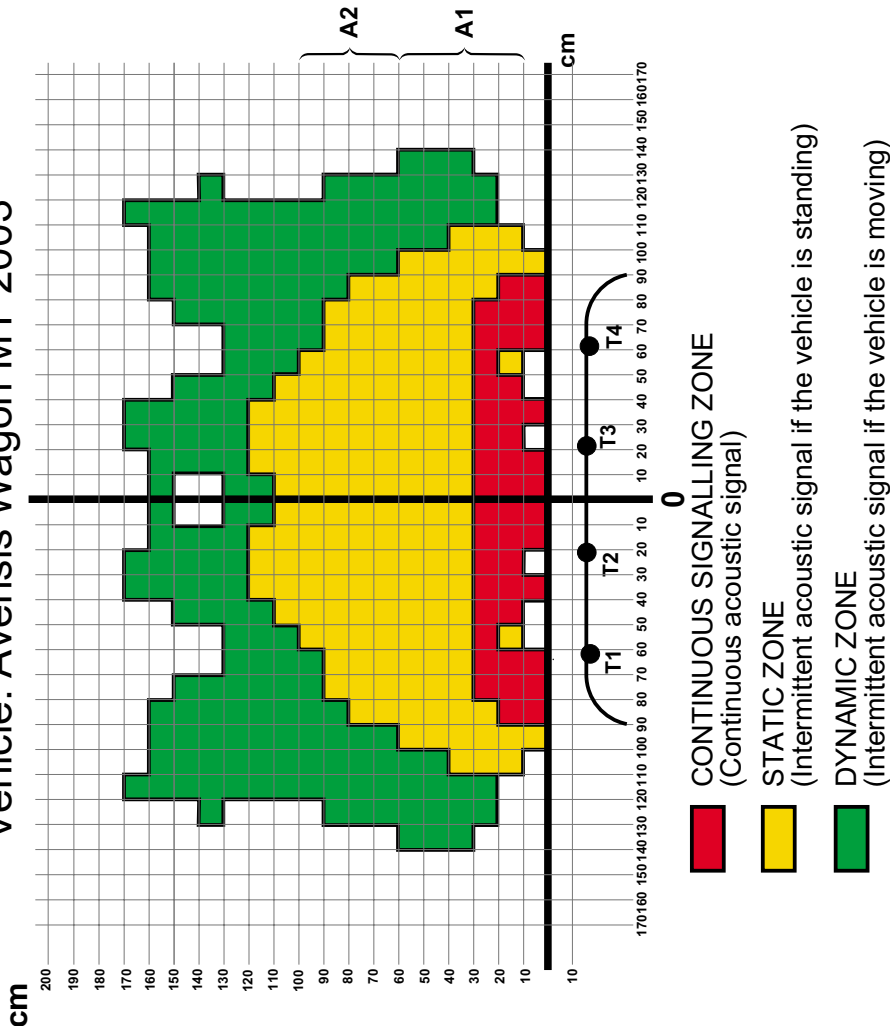


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground, load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 (MALSO) - Aug 07, 2002.*

## Vehicle: Celica MY 2002

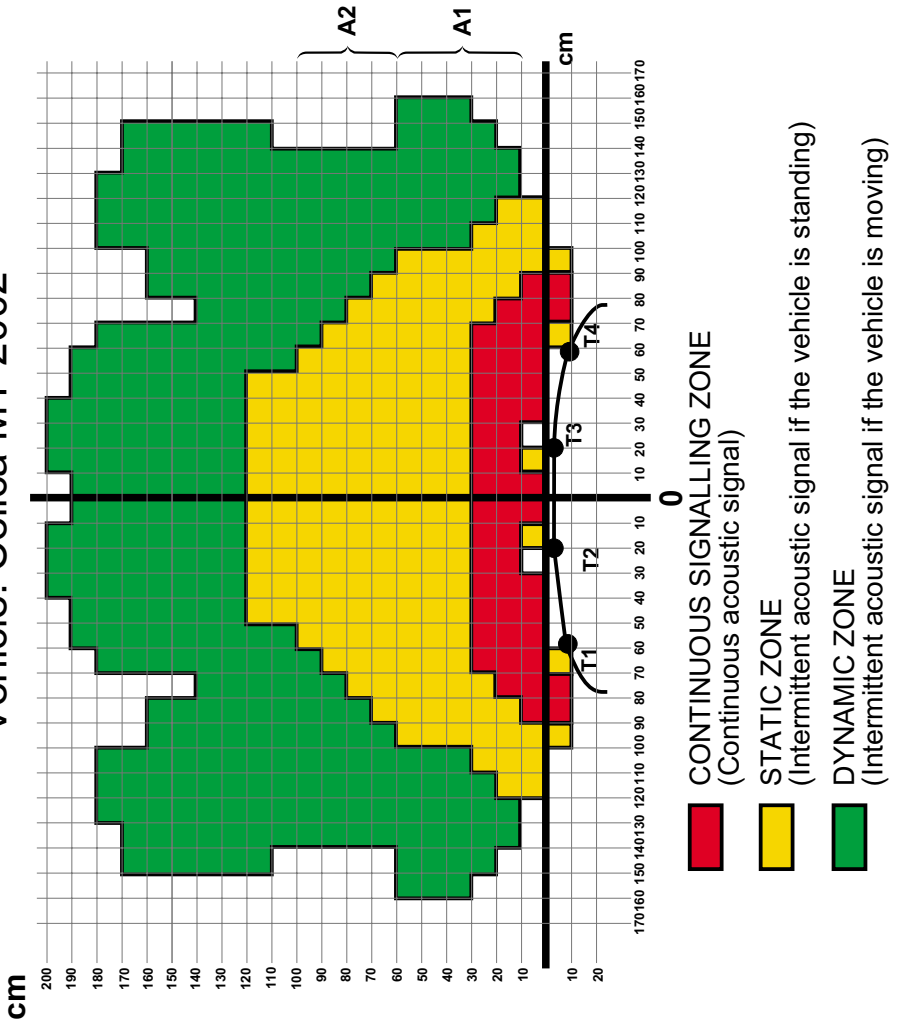


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground, load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 (MALSO) - Aug 07, 2002.*

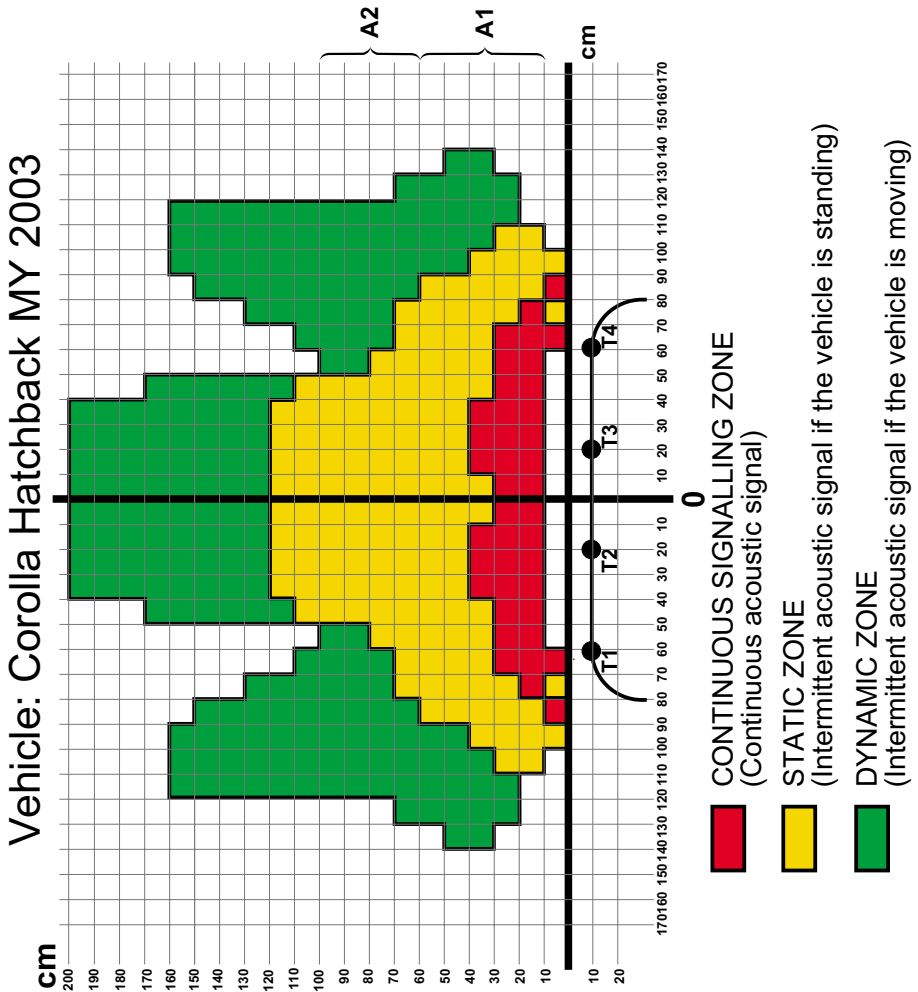


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

## Vehicle: Corolla Sedan MY 2003

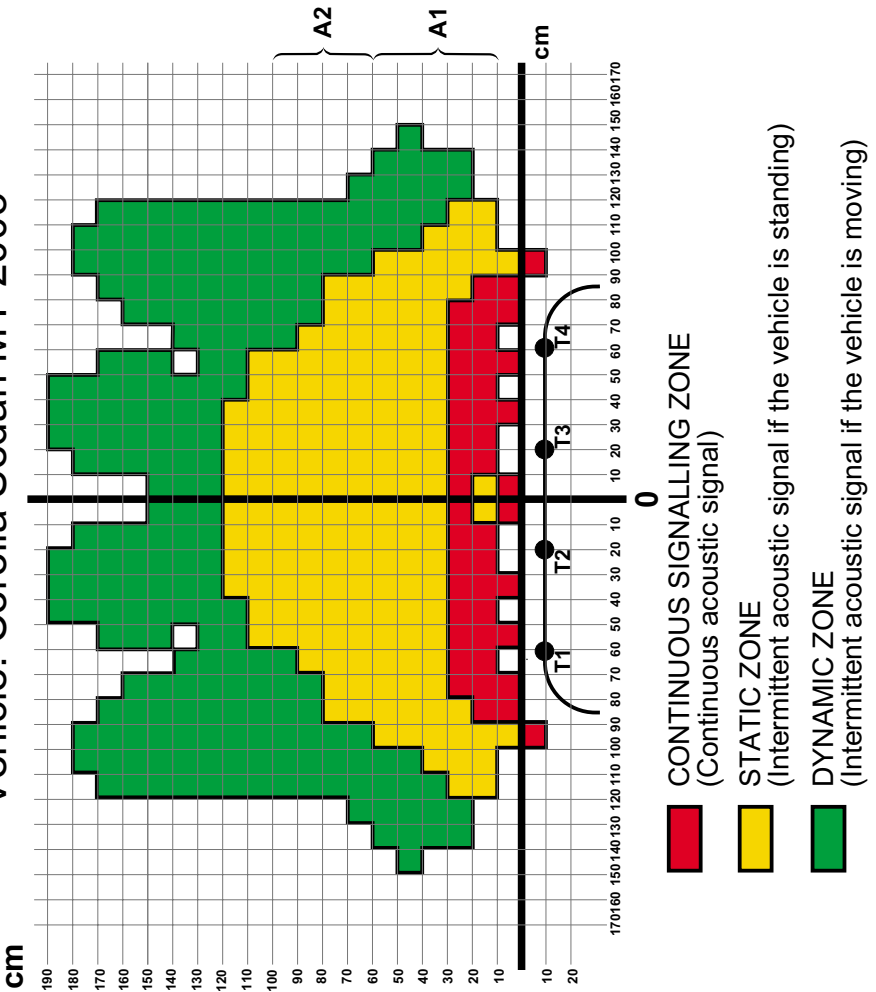

*These graphs are given as typical example only, for a basic system troubleshooting.*


*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground, load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 (MALSO) - Aug 07, 2002.*



# Vehicle: Corolla Verso MY 2004

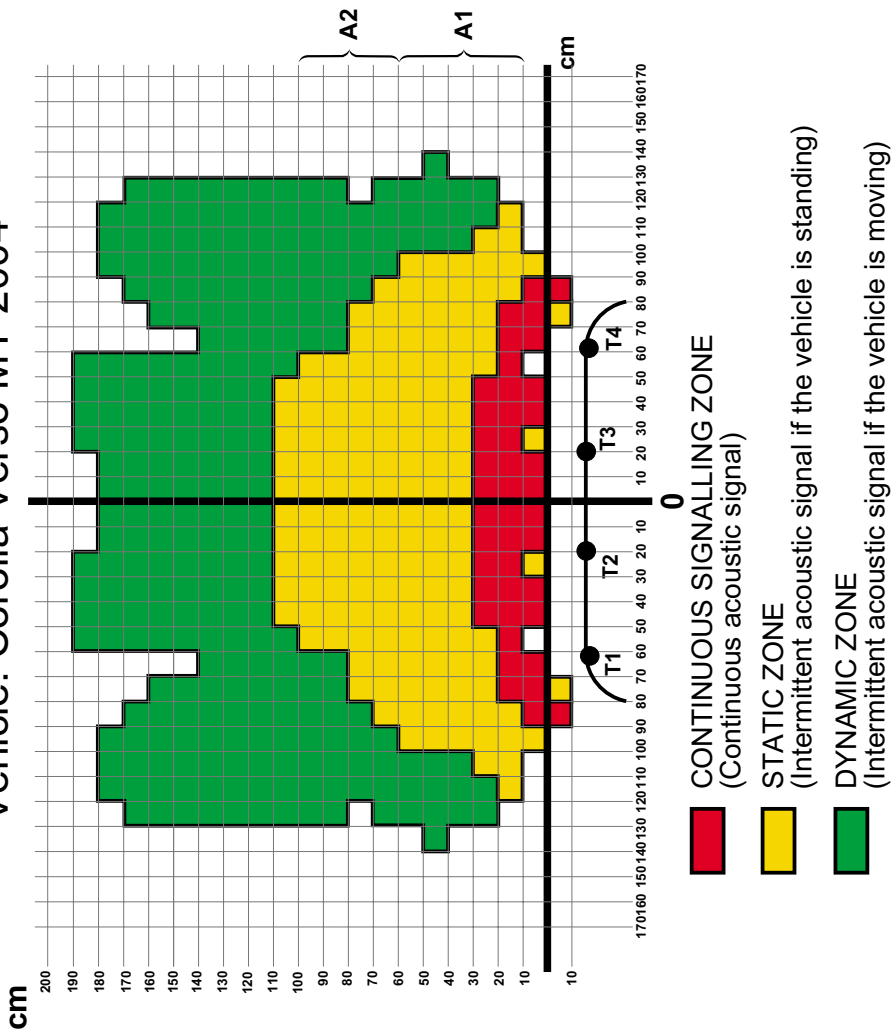


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

# Vehicle: Corolla Wagon MY 2003

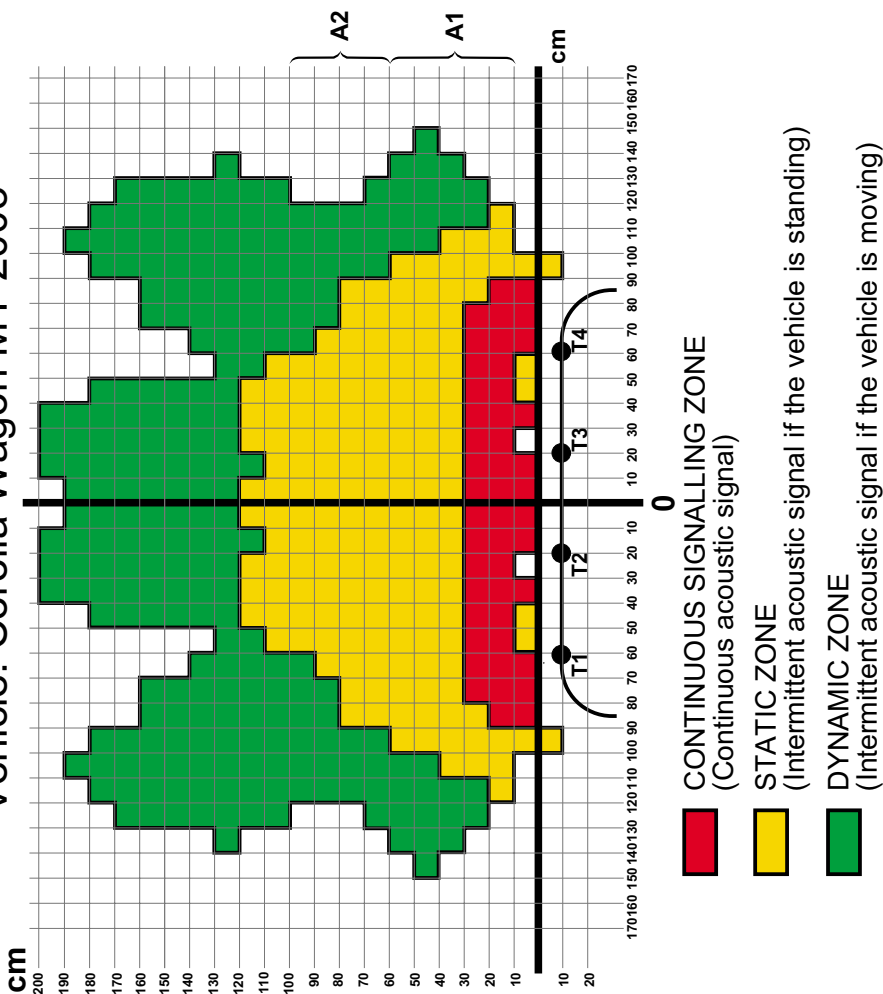


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

## Vehicle: Hiace with PZ401-... Towbar

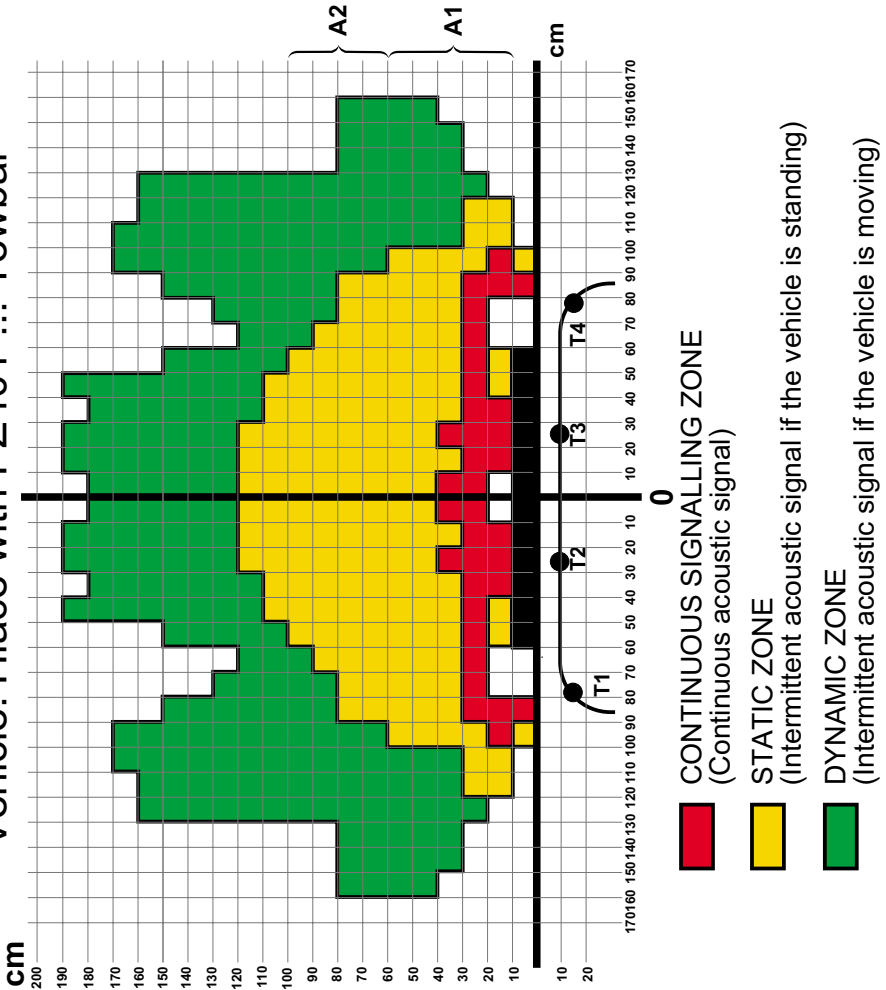


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground, load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 (MALSO) - Aug 07, 2002.*

## Vehicle: Hiace with PZ408-... Towbar

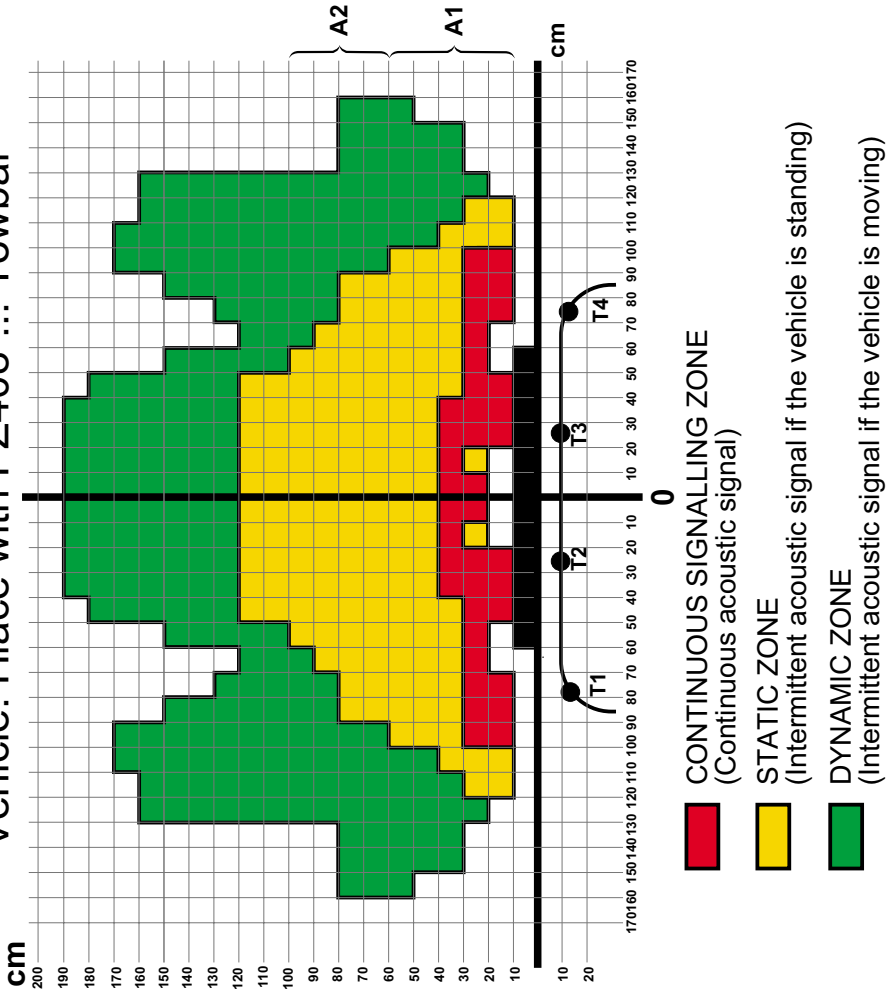


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

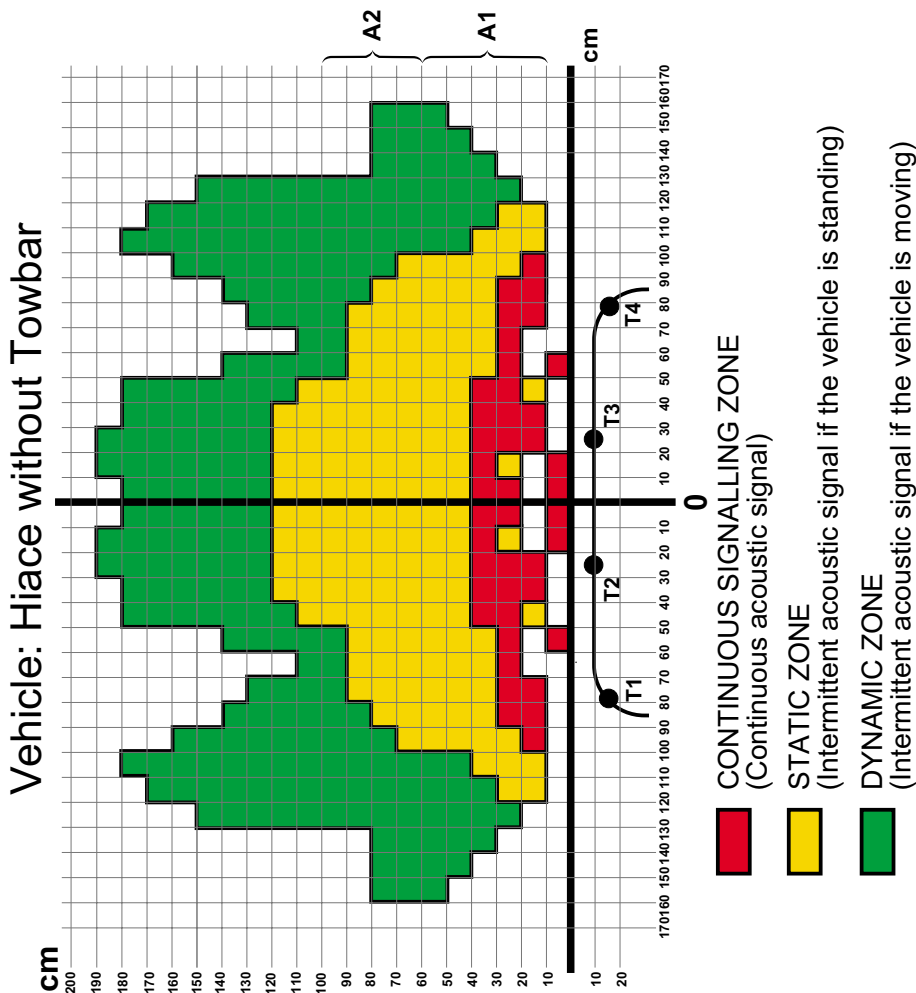


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

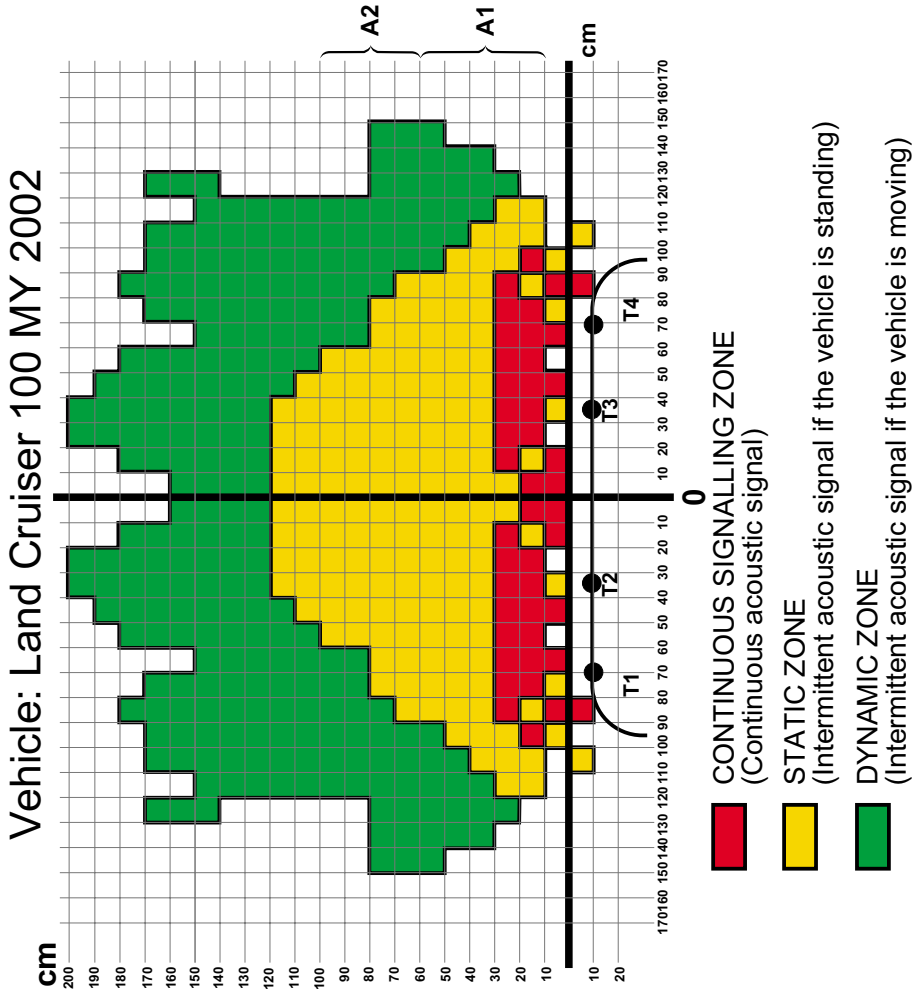


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

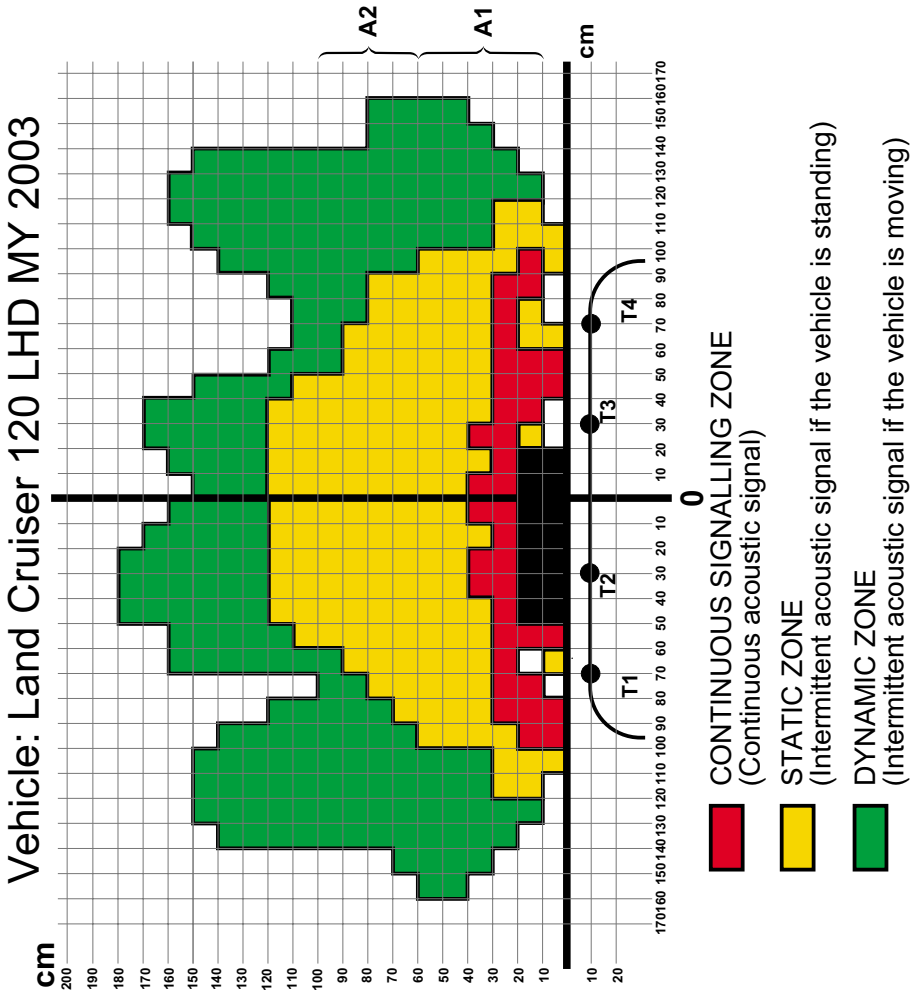


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

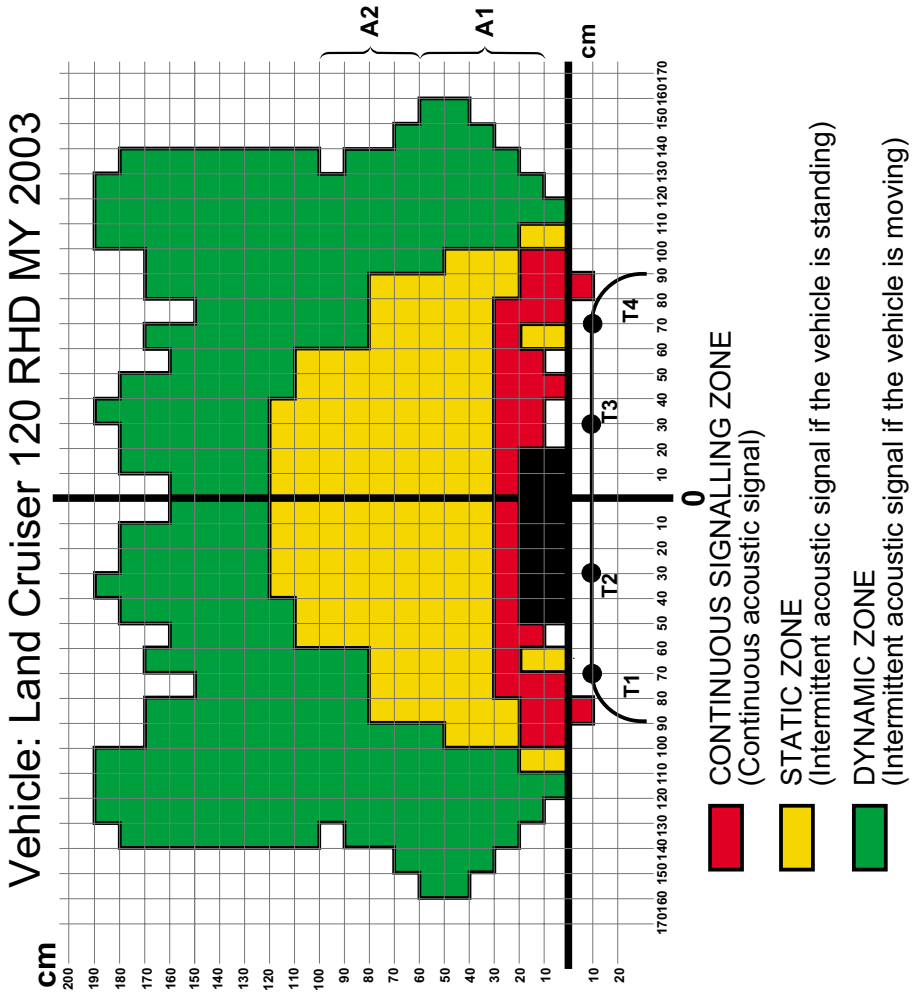


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*



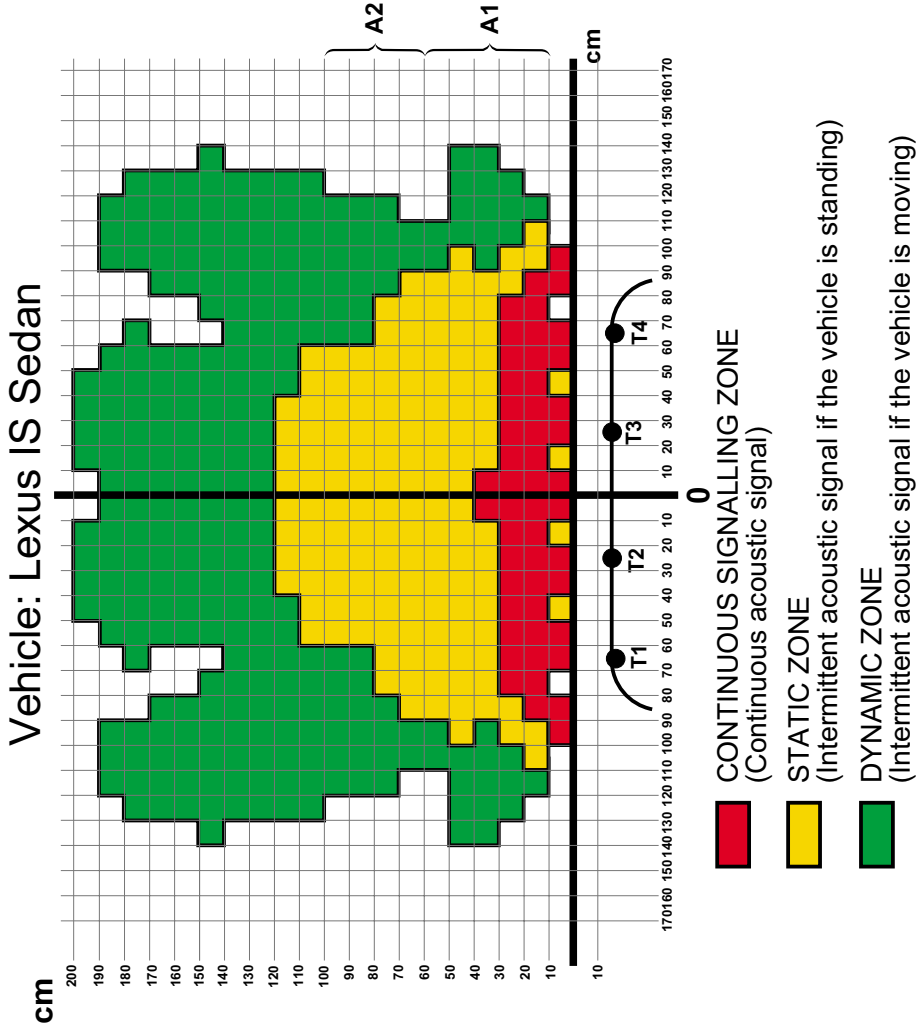


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground, load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 (MALSO) - Aug 07, 2002.*

# Vehicle: Lexus IS SportCross

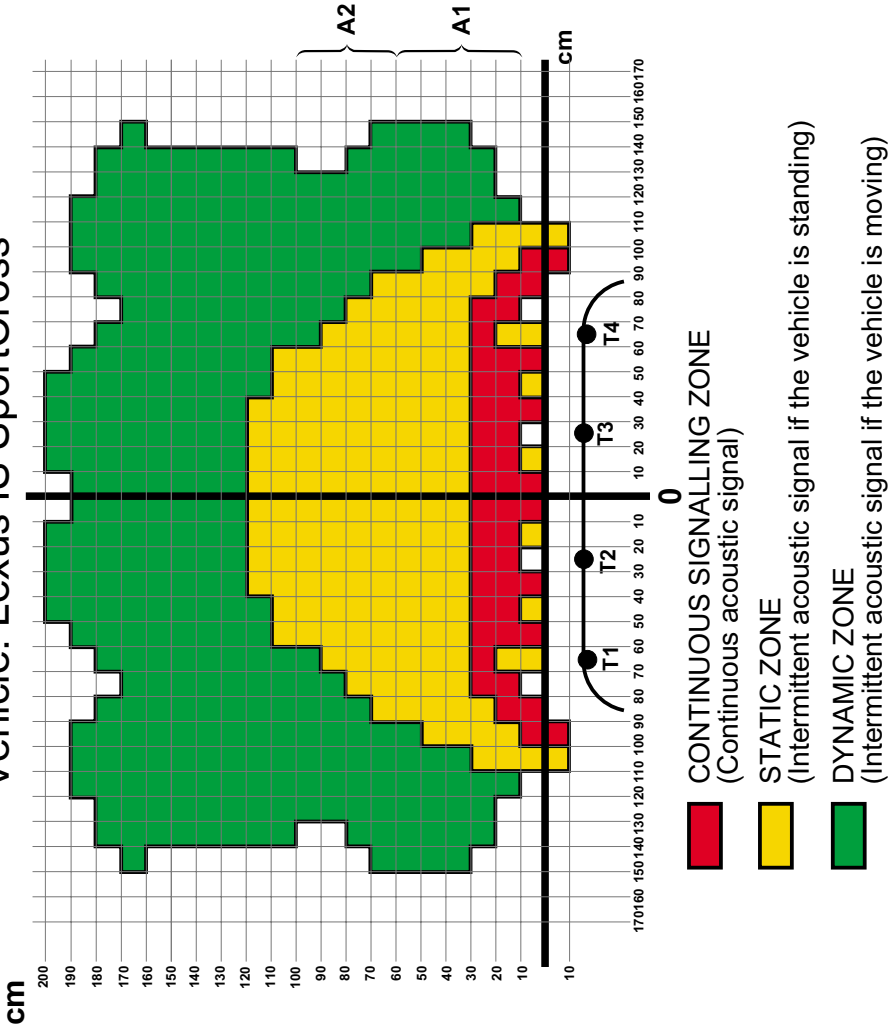


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

## Vehicle: Lexus RX 300 MY 2003

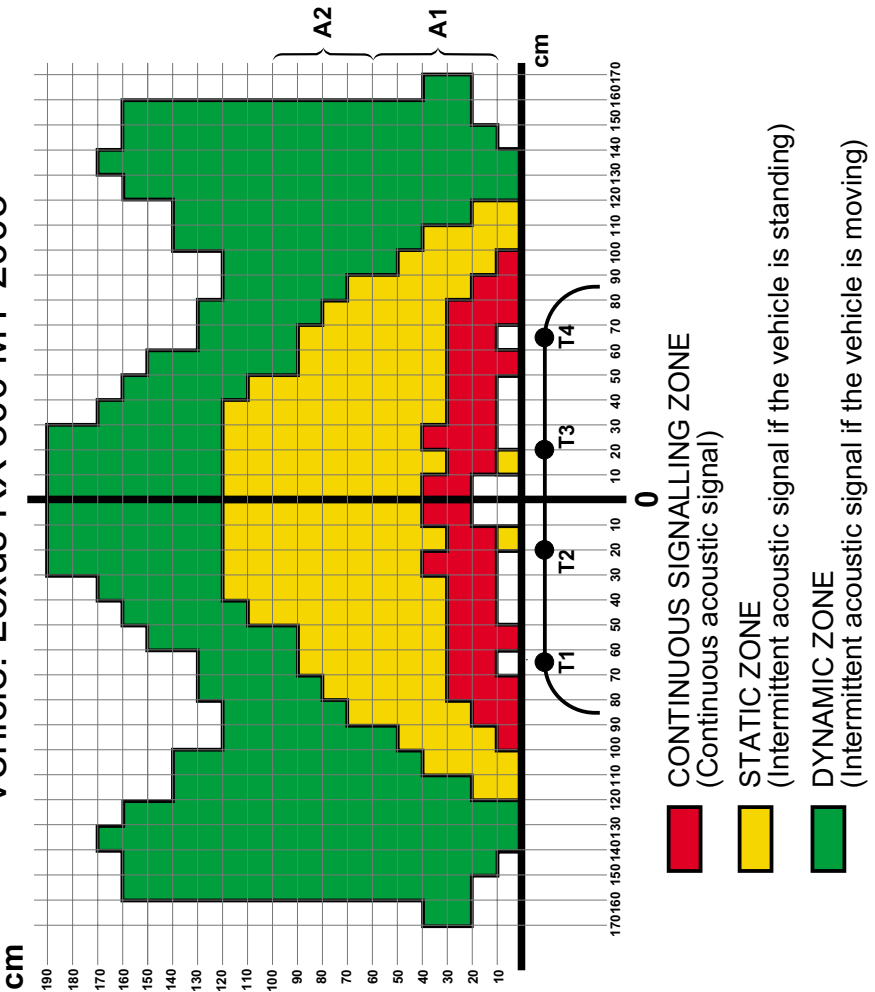


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

# Vehicle: Previa MY 2003

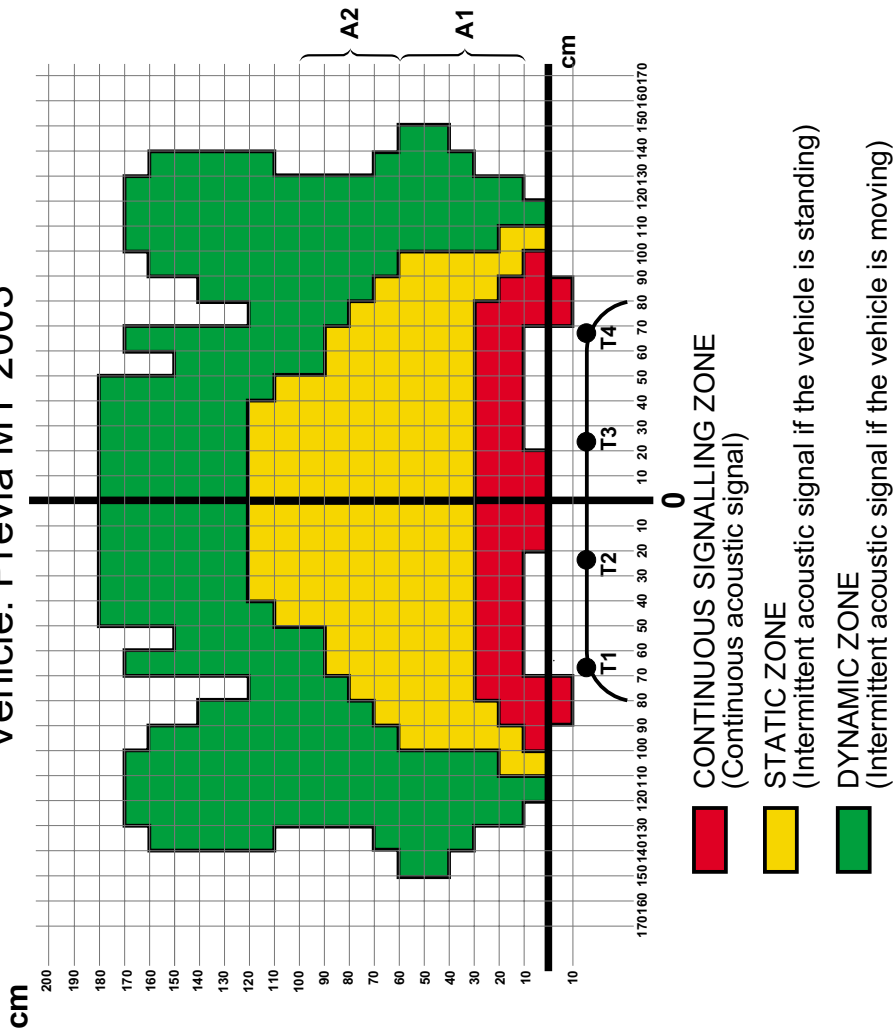


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

# Vehicle: Prius MY 2003

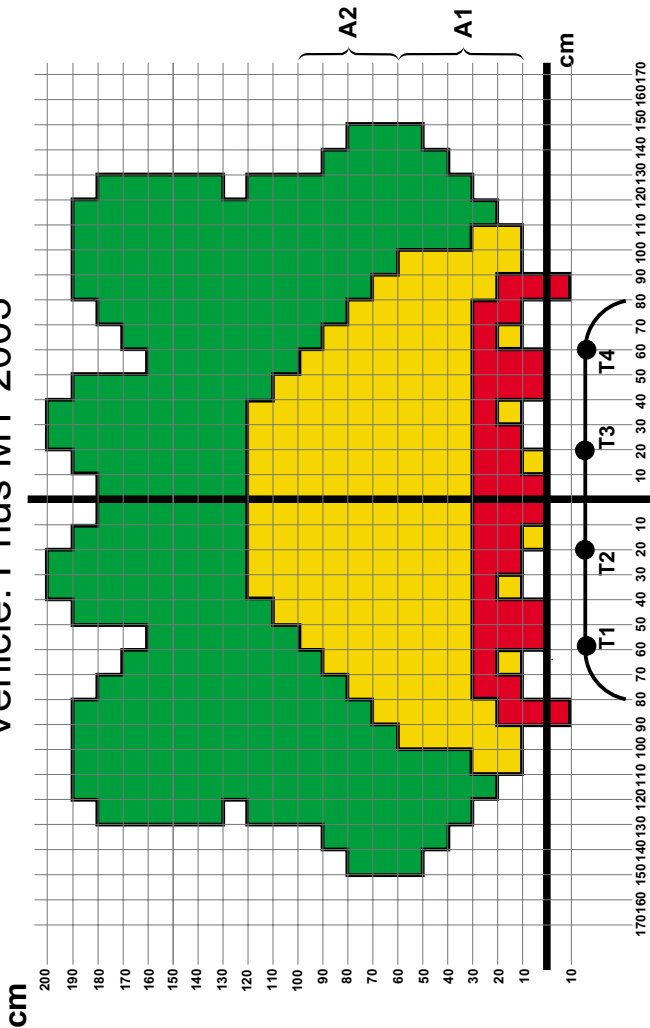

- CONTINUOUS SIGNALLING ZONE  
(Continuous acoustic signal)
- STATIC ZONE  
(Intermittent acoustic signal if the vehicle is standing)
- DYNAMIC ZONE  
(Intermittent acoustic signal if the vehicle is moving)


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

# Vehicle: Rav4 LHD MY 2003

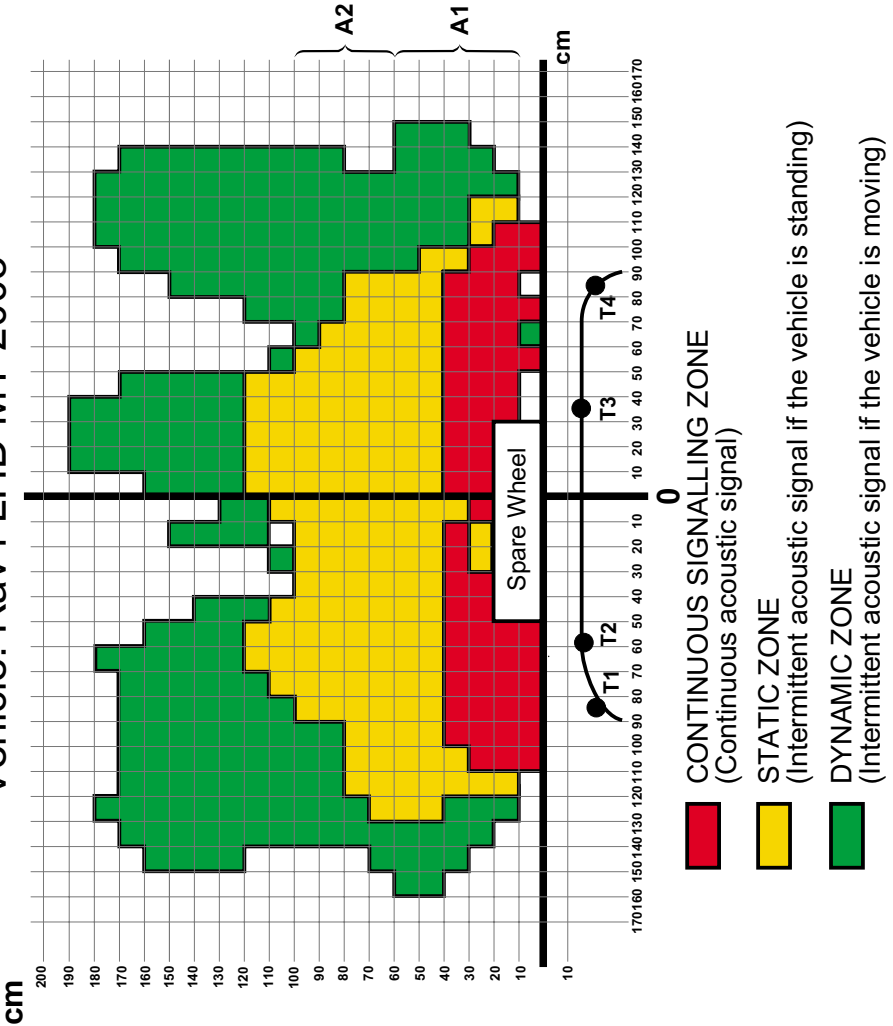


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

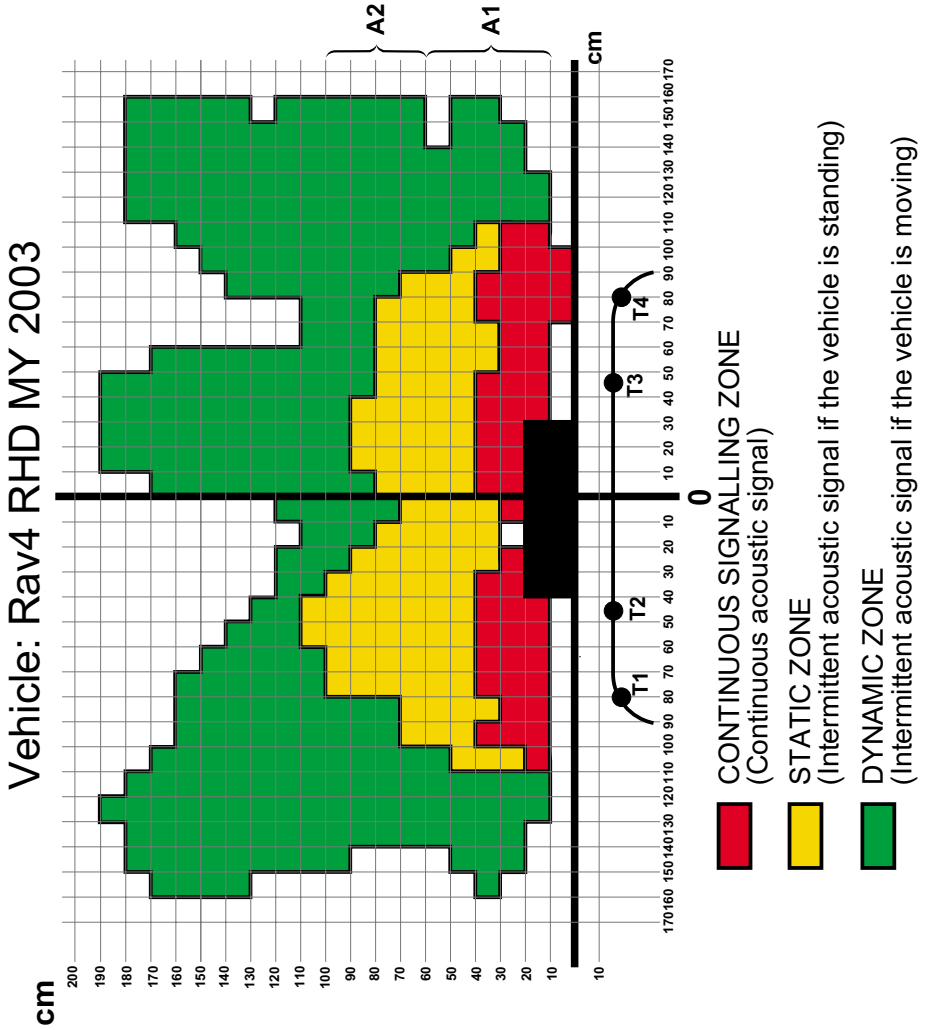


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground , load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 ( MALSO) - Aug 07, 2002 .*

## Vehicle: Yaris MY 2003

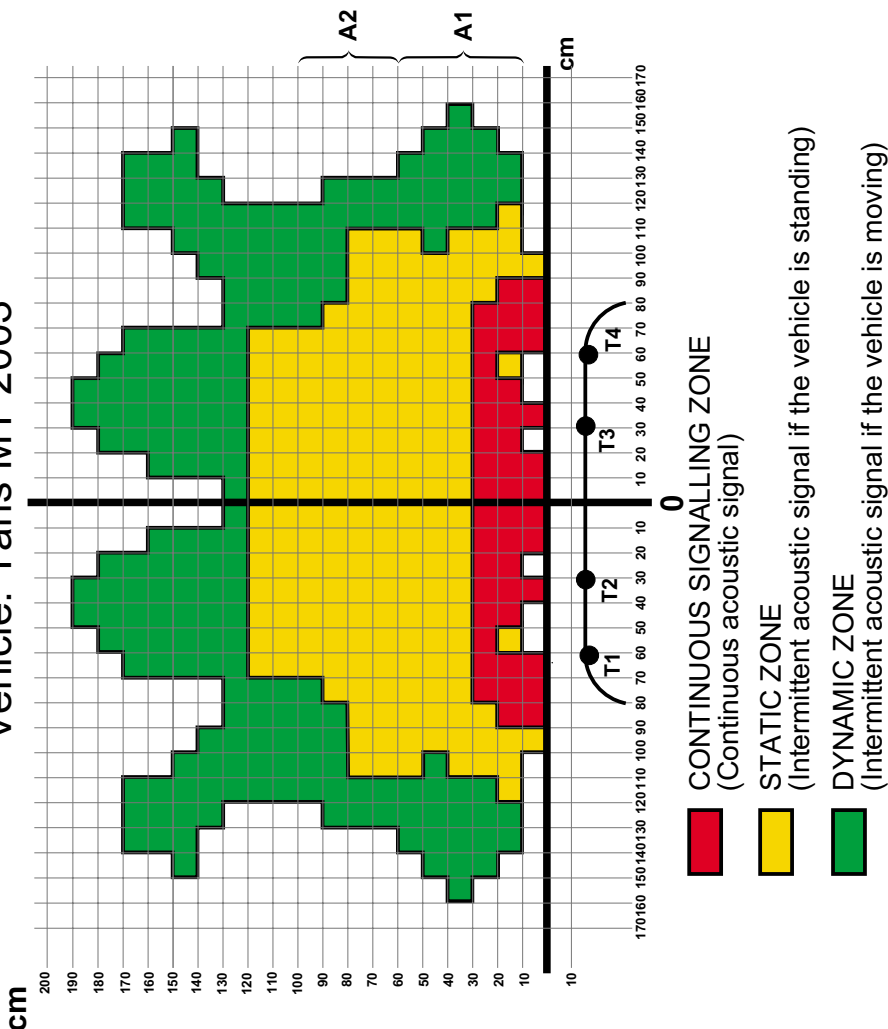


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground, load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 (MALSO) - Aug 07, 2002.*



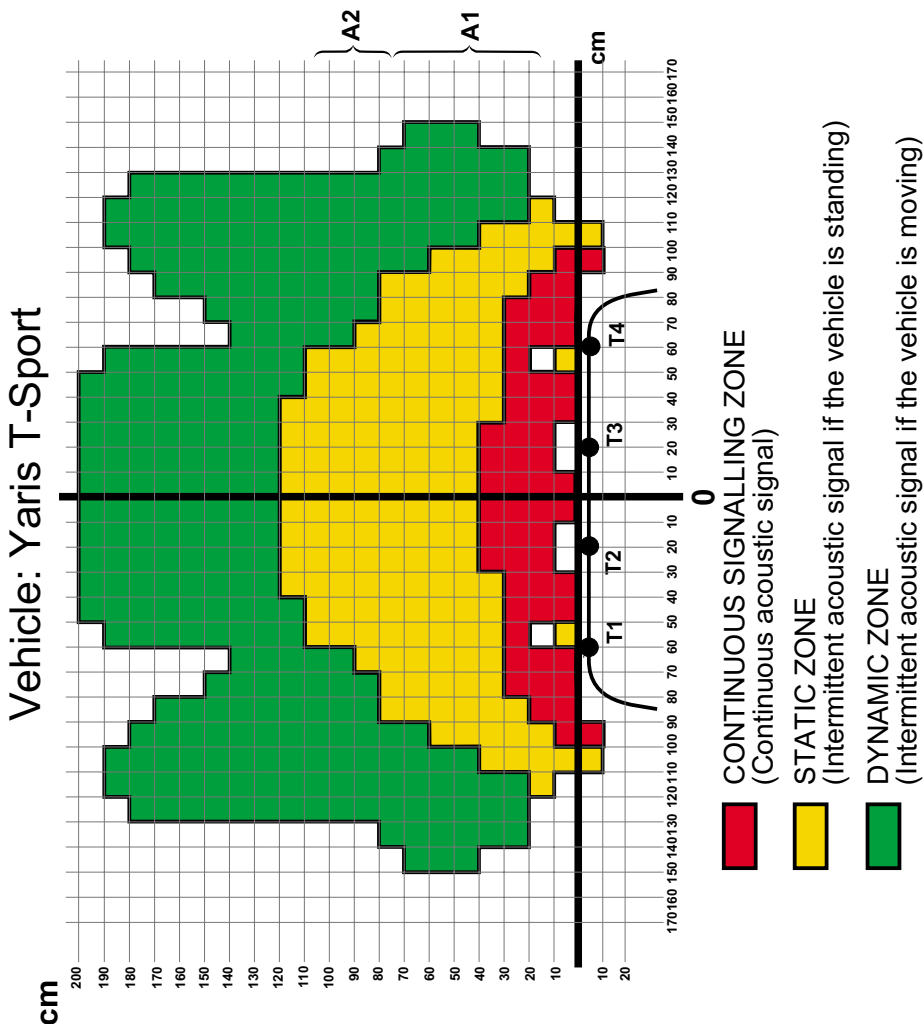


*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground, load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 (MALSO) - Aug 07, 2002.*

# Vehicle: Yaris Verso MY 2002

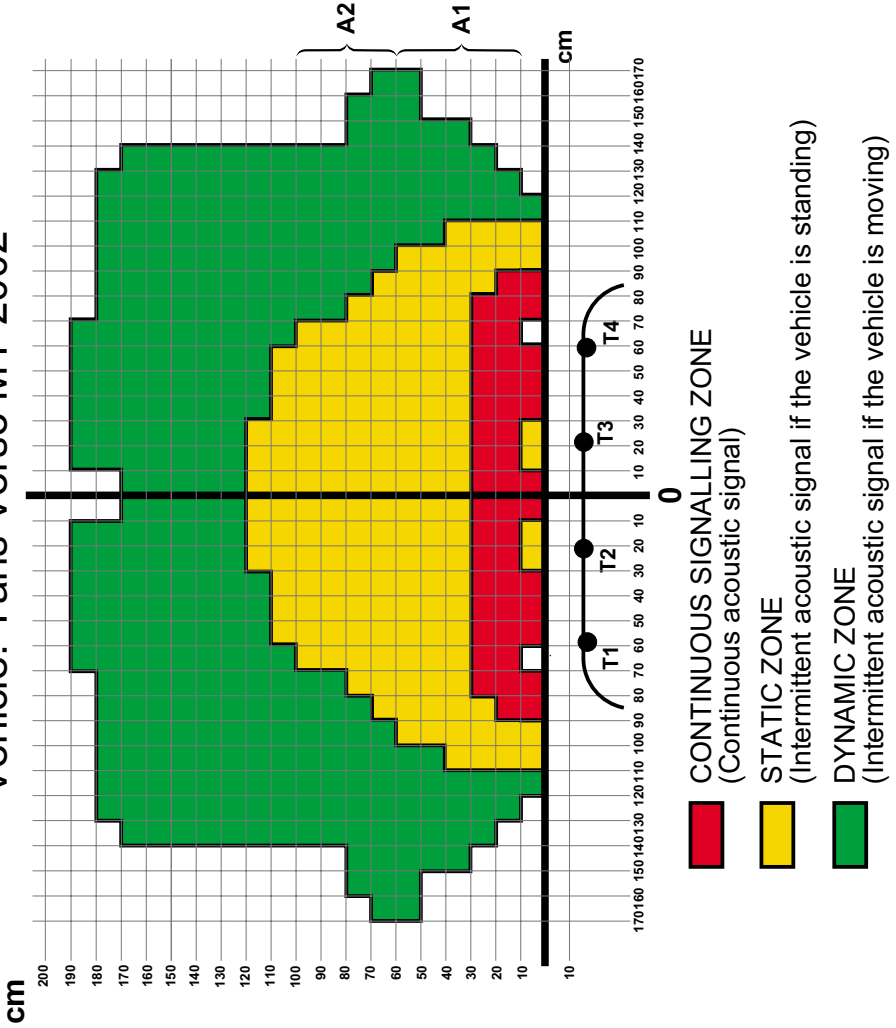

*These graphs are given as typical example only, for a basic system troubleshooting.*

*These graphs are therefore not intended and cannot be used as reference for warranty claims.*

*The final performance of the TPA 400 system is depending on vehicle conditions (height from ground, load status), ambient conditions (kind of ground surface and walls around, clean sensors external surface, ultrasonic sources, ambient temperature) and installation tolerances, especially for the dynamic covering zone.*

*The performance of the system must be checked according to ISO standard 17386 (MALSO) - Aug 07, 2002.*

